


5RZ38

SPECIFICATIONS


■ DIMENSIONS

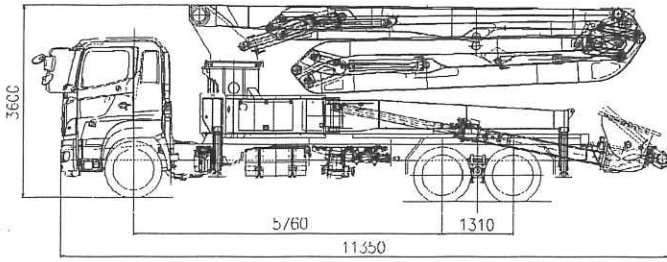

■ BOOM

Boom type	5-section RZ-Boom
Vertical reach	37.6m
Horizontal reach	33.6m
End hose length	4m
Delivery pipe diameter	125mm(5")
Slewing range	370°
1st section articulation	92°
2nd section articulation	180°
3rd section articulation	180°
4th section articulation	245°
5th section articulation	240°
1st section length	8,200mm
2nd section length	6,400mm
3rd section length	6,000mm
4th section length	6,500mm
5th section length	6,500mm

■ WORKING RANGE

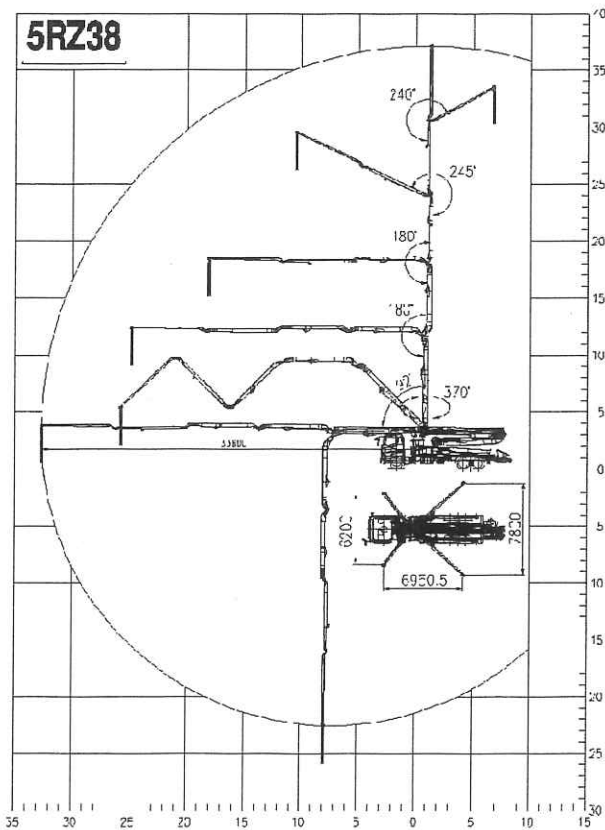

■ OUTRIGGER

Front Outrigger Type	One Stage Diagonal Extension Full Spread Width 6,200mm
Rear Outrigger Type	One Stage Swing-out Full Spread Width 7,800mm

■ PUMP SPECIFICATIONS

Maximum output	150m ³ /h
Concrete cylinder	Φ230×2100mm
Stroke per minute	29
Concrete pressure	87bar
Hopper Capacity	600Liter
S-Valve	Φ230×Φ180
Main pump	A4VG125×2